




### Features

- CCC and RoHS compliant;
- Contacts sealed in ceramic capsules and inert gas;
- Contacts protected against contamination. e.g oxidation and corrosion;
- Magnet arc blowout;
- Up to 900VDC Cutoff;
- Compact and lightweight;

### Applications

- ◆ Main contactors for larger hybrid electric vehicles (HEV), plug-in hybrids (PHEV) and full electric vehicles (BEV);
- ◆ Battery charging systems;
- ◆ Power charging devices;
- ◆ Solar power systems;
- ◆ Could server and uninterrupted power supply (UPS)

### Product Code Structure

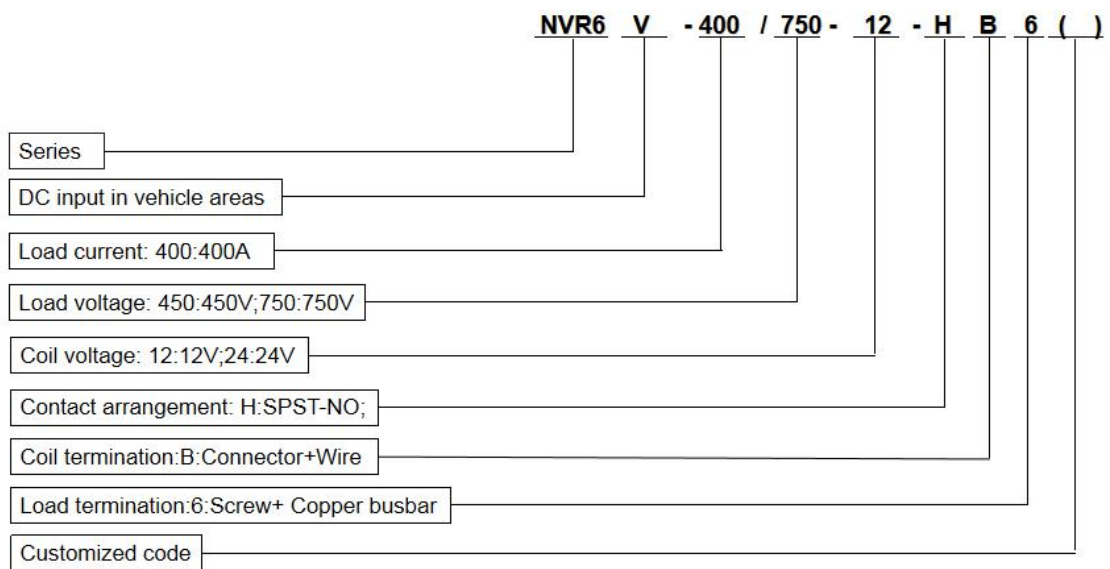

### Coil Data

Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Rated operating power W
12	≤8.4	≥1	45(Initial) 4(Holding)
24	≤16.8	≥2	

- 1) Operate voltage and release voltage may vary with environmental temperature.
- 2) The ripple factor should be under 5%.



### Main Contact Data

Contact arrangement		1H
Initial contact resistance		$\leq 3\text{m}\Omega$ (6V DC/20A)
Rated current		400A
Limiting short-time current		600A:10min
		1000A:5s
Max. switching current		3500A (320V DC)
Overload break		300 times (600A/750V DC)
Reverse break		100 times (400A/400V DC)
Dielectric strength	Between contact and coil	3000V AC
	Between contacts	
Insulation resistance	Between contact and coil	Min: 1000M $\Omega$ (1kV DC)
	Between contacts	
Operate time		$\leq 30\text{ms}$
Bounce time		$< 5\text{ms}$
Release time		$\leq 10\text{ms}$

### Other Data

Endurance	Mechanical		$2 \times 10^5$ times
	Electrical (Resistive load)	450V DC	$1 \times 10^4$ times
		750V DC	$6 \times 10^3$ times
Mechanical performance	Shock resistance (Functional)		20G
	Shock resistance (Destructive)		50G
	Vibration resistance (Functional)		4G (10~500Hz)
	Vibration resistance (Destructive)		4G (10~500Hz)
Operational condition	Ambient temperature		$-40^\circ\text{C} \sim +85^\circ\text{C}$
	Relative humidity		5%~85% R. H.
Weight			Approx. 800g




尼普顿电器  
Neptune Electric

# HVDC Relay NVR6V-400




Ceramic  
Series

## Estimated Life Diagram

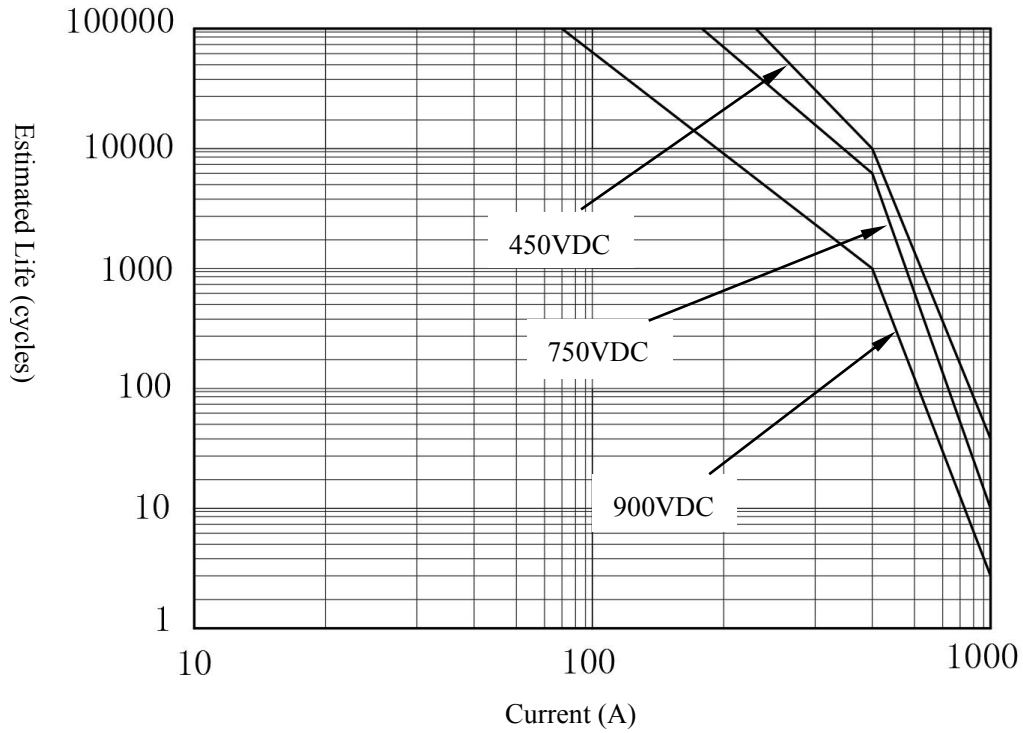


## Contacts Current Capacity Diagram


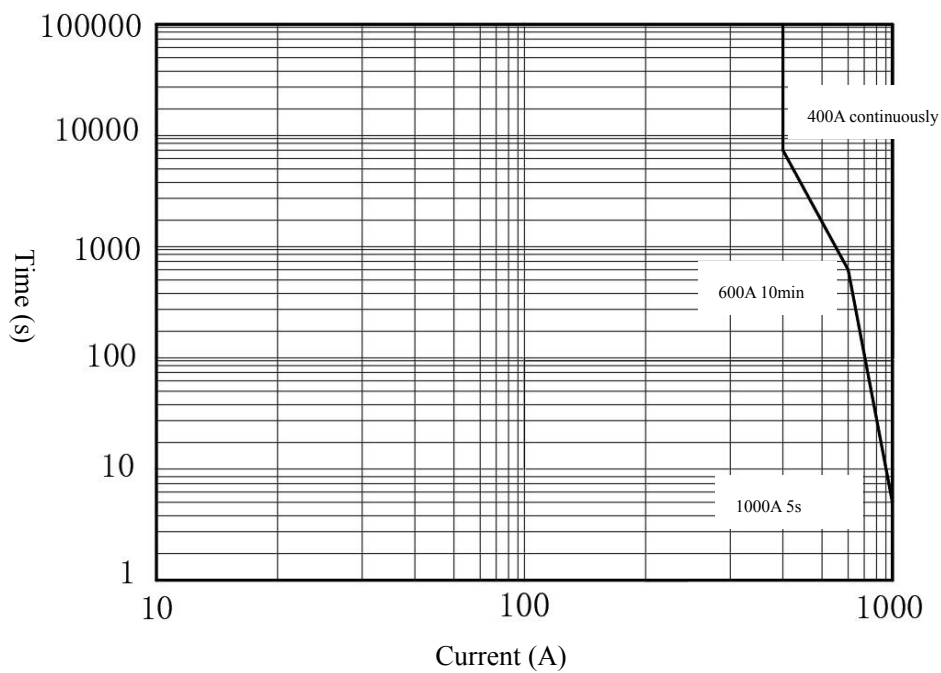






### Dimensions (mm)

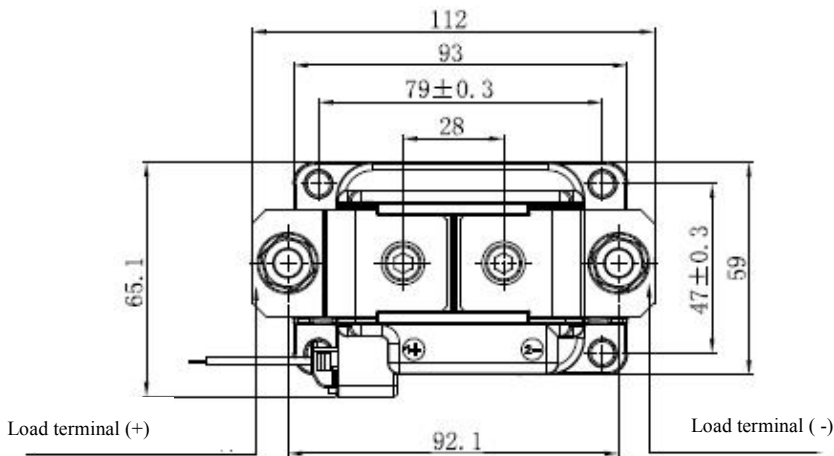

Permissible deviations for basic size range	Tolerance
Up to 10	±0.3
Over 10 up to 50	±0.6
Over 50	±1.0

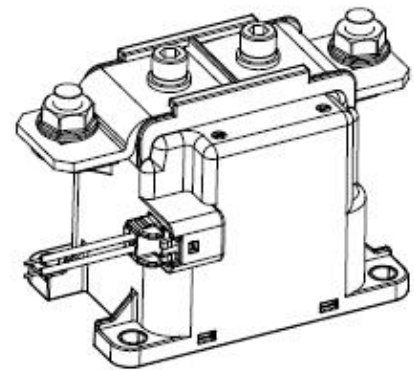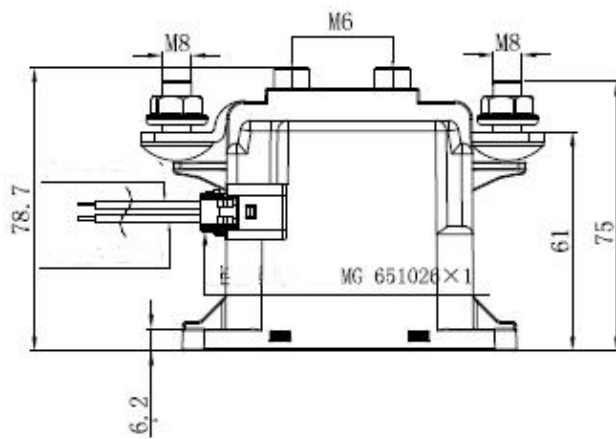

### Circuit and Layout Dimensions (mm)

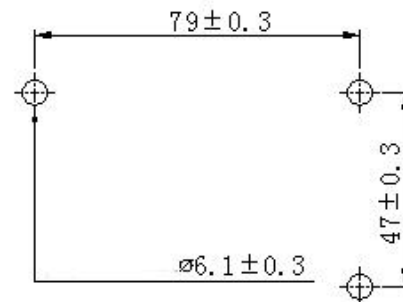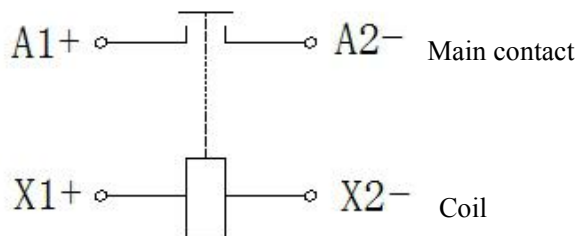



### Cautions

- Please use relays in the conditions described in the specification. Otherwise product performance will not be guaranteed.
- Please add surge protection in parallel if an inductive load ( $L/R > 1\text{ms}$ ) is applied.
- Contact resistance may increase if a relay is operating without a load.
- Please connect the terminals correctly. Any wrong connection may cause circuit damage such as malfunction, overheat, and fire.
- Screwing-tightening condition: A) M5 Screw:  $3\text{Nm} \sim 4\text{Nm}$  (Tightening torque for fixing relay body) B) M6 Screw:  $6\text{Nm} \sim 8\text{Nm}$  (Tightening torque for contact terminal) C) M8 Screw:  $10\text{Nm} \sim 12\text{Nm}$  (Tightening torque for external contact terminal)
- Use the suitable wires or busbars according to the current. Carrying current: 400Amps; diameter of  $240\text{mm}^2$  (min.).
- Standard operation condition: temperature  $-40^\circ\text{C} \sim 85^\circ\text{C}$ , humidity  $5\% \sim 85\% \text{R.H.}$ .
- Correct installation of the connector: the coil circuit is polarized.
- If the relay is dropped, it should not be used again.

(Please do not determine specifications based on this document. Contact our sales staff for more information and supports.)